

Stump Grinder - Shaver

DÉCHIQUETEUSE DE SOUCHES

TRACTOR – Mounted Stump Busters

Grind through even the toughest stumps with ease with Shaver's powerful line-up of PTO-powered, tractor mounted Stump Busters.

TWO TRACTOR POWERED UNITS: The powerful, industrial grade SC-50 and the compact SC-25, with lower tractor horse power requirements, so you can match you machine to your needs.



SC-50 STUMPBUSTER

The SC-50 is built for industrial-strength cutting. Mounted to the 3-point hitch of any 35 – 100 hp tractor and the unit's 34 inch diameter cutting wheel makes quick work of stumps, grinding them down 12 inches below ground. The SC-50 features a single-direction cutting design that reduces wear on bearings and the gearbox, giving you a payback on your investment that will last for years.

SC-25 STUMPBUSTER

The SC-25 is built for lower horsepower tractors. The unit can easily whittle away stumps up to 24 inches high. With a 55 degree cutting arc, the SC-25's 24 inch diameter cutting wheel can grind down a 45 inch diameter stump into a 10 inch hole in minutes. Repositioning the unit for another pass lets you take on even larger diameter stumps.



GEAR BOX utilizes an oversized shaft and heavy duty roller bearing in an oil bath.

SLIP CLUTCH located under the shield protects shear bolts and shaft from abnormally severe shock loads.

CUTTING WHEEL made of $\frac{3}{4}$ " steel plate, for long life.

LIFT AND SWING CYLINDERS are hydraulically controlled from the safety of the tractor seat.

PARKING STAND conveniently supports the cutter when the unit is not in use, eliminating the strain in hinges.


GUARD ASSEMBLY AND SHIELD Debris shoots away from tractor, into heavy, reinforced rubber shield.

Easy clean-up. ARCH Cat. I and II 3-point arch support gives added stability.

SKID STEER – Mounted StumpBusters

Shaver's hydraulically powered Stump Buster is the choice for large contractors, landscapers and maintenance departments. These units feature **Power, Durability and Simplicity**.

Mounted on a skid steer loader, they are easy to manoeuvre in compact areas that are impossible to reach with other types of machines.

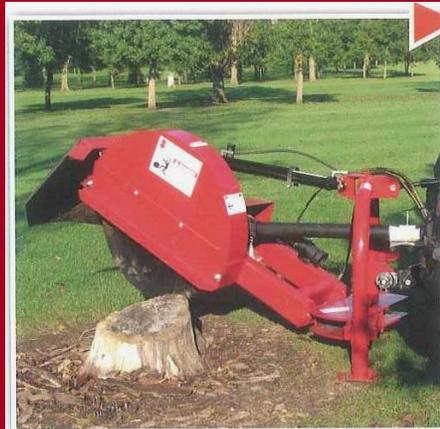

SC-50 STUMPBUSTER

The SC-50 is built for industrial-strength cutting. Mounted to the 3-point hitch of any 35 – 100 hp tractor and the unit's 34 inch diameter cutting wheel makes quick work of stumps, grinding them down 12 inches below ground. The SC-50 features a single-direction cutting design that reduces wear on bearings and the gearbox, giving you a payback on your investment that will last for years.

SC-25 STUMPBUSTER

The SC-25 is built for lower horsepower tractors. The unit can easily whittle away stumps up to 24 inches high. With a 55 degree cutting arc, the SC-25's 24 inch diameter cutting wheel can grind down a 45 inch diameter stump into a 10 inch hole in minutes. Repositioning the unit for another pass lets you take on even larger diameter stumps.



MANEUVERABILITY: Eliminate stumps that are up to 45" in diameter, near buildings, sidewalks or hillsides, without repositioning the unit. Skid Steer mount allows improved visibility. Clean up a whole grove with stumps up to 2' high.

POWER: Hydraulic motor powers the $\frac{3}{4}$ " thick steel cutting wheel, easily turning hardwood into mulch. With the large cutting wheel and high hub torque, cut a full 55° swath below ground in less than 2 minutes.

DURABILITY: Carbon steel teeth aggressively chew through stumps with little wear. Single direction cutting puts less stress on cylinder, bearings and gearbox. Heavy-duty bearings ride in an oil bath, virtually eliminating friction wear.

SIMPLICITY: Quick-tach system. Single toggle switch on loader allows the operator to move easily from stump to stump, without leaving the loader seat. 2-1/2" swing cylinder and hydraulic hoses are standard size for easy repair or replacement. Teeth are easy to access and replace using a standard wrench size.

StumpBuster™

The Stump Grinder



SPECIFICATIONS	SC-25	SC-25H	SC-50	SC-50H
Drive System	PTO w/ slip clutch	Electric over hydraulic drive	PTO w/ slip clutch	Electric over hydraulic drive
Hydraulic Requirements	-	15 - 25 gpm	-	25 - 40 gpm high-flow
Horsepower	15 - 35 hp	-	35 - 100 hp	-
Mounting	Cat. I 3-point mount	MBS-77-10 Universal Bracket	Cat. I & II 3-point mount	MBS-77-10 Universal Bracket
Max. Cutting Diameter	45"	45"	45"	45"
Max. Cutting Depth	10" below ground	10" below ground	12" below ground	12" below ground
Cutting Arc	55 degrees	55 degrees	55 degrees	55 degrees
Cutting Wheel	¾"	¾"	¾"	¾"
Cutting Wheel Speed	980 rpm	980 rpm	895 rpm	795 rpm
Carbide Teeth	23	23	25	25
Shipping Weight	832 lbs.	829 lbs.	1181 lbs.	1238 lbs.
Parking Stand	standard	standard	standard	standard



DISTRIBUTED BY:



www.walcoequipment.com

HEAD OFFICE

20 ARTHUR STREET NORTH, ELMIRA, ONTARIO N3B 1Z9

TEL: (519) 669-4025 FAX: (519) 669-1436

ORDER DESK

e-mail: orders@walcoequipment.com

TEL: (519) 669-1401 FAX (519) 669-3499

QUEBEC OFFICE

364 RTE.122 ST. GERMAIN DE GRANTHAM, QUÉBEC J0C

TEL: (819) 395-5115 Fax (819) 395-2624

e-mail: walcoqc@walcoequipment.com

WALCO USA

4469 292nd St. E. Box 57 Randolph MN 55065

Tel: (507) 663-9090 Fax (507) 663-0999